

AZ-KDW2MPS

K-Series

Full HD IP Height Strip Spy Camera



ANALOG CAMERA

AHD CAMERA

IP CAMERA

DVR

NVR

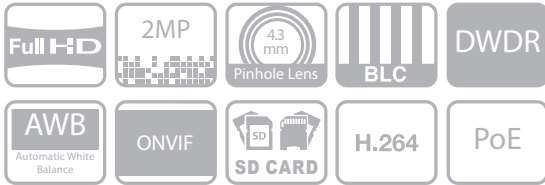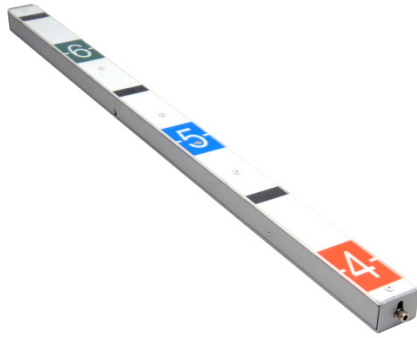

Key Features

- 1/2.8" SONY Exmor CMOS Sensor
- Fixed-Focal 4.3mm Pin Hole, F2.0
- Triple Stream (H.264, MPEG4, MJPEG)
- Digital WDR
- Easy Install : Zero Configuration, Discovery, PoE
- Event Boosting, FTP Image upload, Web Casting, Open VPN, QoS, IP Filtering
- Support: Onvif Profile S
- Privacy Masking, Support progressive scan
- Cross Web Browsing(IE, Safari, Firefox, Chrome)
- Event Buffering
- Support SD Card Up to 32GB

Technical Specification

AZ-KDW2MPS	
VIDEO	
Image Device	1/2.8" SONY Exmor CMOS Sensor
Total Pixel	2000(H)x1241(V)
Video Compression	H.264, MPEG4, MJPEG
Security	Multi User Authority, IP Filtering, HTTPS, SSL
Resolution	1920x1080, 1280x720/1024, 704x480/576, 640x480, 352x240/288, 320x240
Frame Rate	Max. 25/30fps
Image Effect	Flip, Mirror
Shutter Speed	Auto(1/10,000~1/60sec)
EXTERNAL IN/OUT	
Alarm	1 Input, 1 Output(EXT. Cable)
Ethernet	RJ-45(10/100Base-T)
SD-Card	SDHC (Max. 32GB)
OPERATIONAL	
BLC	Yes
Day & Night Mode	Day
Digital Zoom	Yes(ROI)
DWDR	Yes
Noise Reduction	2DNR
Motion Detection	16 Programmable Area (Include Area 8, Exclude Area 8)
Privacy Mask	8 Programmable Zone
Auto Recovery	Backup, Restore
Protocol	TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, QoS, FTP, UPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf
Max. User Connection	Live : 10 Users, Playback : 3 Users
LENS	
Focal Length	4.3mm Pin Hole, F2.0
ENVIRONMENTAL	
Operating Temperature	-10°C ~ 50°C
Operating Humidity	0~90% RH (Non-Condensing)
ELECTRICAL	
Power Supply	12VDC
Power Consumption	88mA(4.0W)@PoE 330mA(4.0W)@12VDC
PoE	Yes
MECHANICAL	
Dimension (mm)	44.45(W)x161.4(H)x34.9(L)mm
Net Weight	1300g