


AZ-KD5MP360

K-Series

5MP Professional Indoor Fish Eye Network Camera

FISH EYE

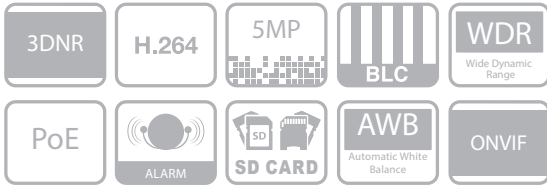

Key Features

- Triple Stream(H.264, MPEG4, MJPEG)
- Support WDR
- Support: Onvif Profile S
- Privacy Masking, Support progressive scan
- Easy Install : Zero Configuration, Discovery, PoE
- Event Boosting, FTP Image Upload, Web Casting, Open VPN, QoS, IP Filtering
- Cross Web Browsing(IE, Safari, Firefox, Chrome)
- Event Buffering
- Support SD Card Up to 64GB

Technical Specification

AZ-KD5MP360	
VIDEO	
Image Device	1/1.8" SONY Starvis CMOS Sensor 5.0 Megapixel
Total Pixel	2,592(H)x1,944(V)
Min. Illumination	TBD
Video Compression	H.264, MJPEG
Security	Multi User Authority, IP Filtering, HTTPS, SSL
Resolution	2592x1944, 2048x1536, 1944x1440, 1920x1080, 1280x1024, 1280x720/960, 1024x768, 104x480/576, 640x360/480, 320x240
Frame Rate	Max. 12.5/15fps@5MP
Image Effect	Flip, Mirror, Aisle
Shutter Speed	Auto(1/10,000~1sec), Manual
Network Time Sync	NTP Server, Synchronized Computer, Manual
EXTERNAL IN/OUT	
Audio	1 Input, 1 Output (Terminal Block)
Alarm	1 Input, 1 Output (Terminal Block)
Ethernet	RJ-45(10/100Base-T)
Audio Compression	G.711
Audio Streaming	2 Way
OPERATIONAL	
Video Analytics	Defog, Tampering, Line Detector, Field Detector
Day & Night Mode	True Day & Night (Auto, Day, Night)
Digital Zoom	Yes(ROI)
Noise Reduction	2DNR, 3DNR
Motion Detection	16 Programmable Area (Include Area 8, Exclude Area 8)
Privacy Mask	8 Programmable Zone
Auto Recovery	Backup, Restore
Network Protocol	TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, QoS, FTP, UPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf
Max. User Connection	Live : 10 Users, Playback : 3 Users
LENS	
Focal Length	Fixed 1.05mm, F2.8
ENVIRONMENTAL	
Operating Temperature	-10°C ~ 45°C
Operating Humidity	0~90% RH (Non-Condensing)
ELECTRICAL	
Power Supply	12VDC
PoE	Yes
MECHANICAL	
Dimension (mm)	119(Ø)x64.6(H)mm
Net Weight	280g