


# AZ-KNZ-2MP12

## K-Series

IP Full HD Mini PTZ Camera

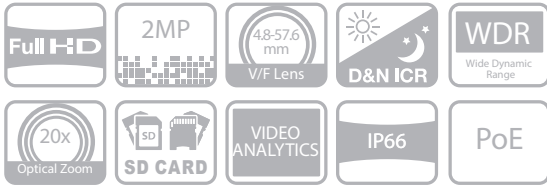

### Key Features

- Full HD 2.0 Megapixel IP PTZ Camera
- True Day & Night
- Triple streaming (H.264, MPEG4, MJPEG)
- Easy Install: Zero Configuration, Discovery
- Support WDR
- Support Onvif profile S
- Event Boosting, FTP Image Upload, Web Casting, Open VPN, QoS, IP Filtering
- Max. 380°/sec Speed(Preset)
- Video Analytics (DIS, Defog, Face Detection, Tampering, Line Detector, Field Detector)
- PoE, 12VDC, 24VAC
- SD Card Up to 32GB Support
- IP66 Certified

### Technical Specification

AZ-KNZ-2MP12	
<b>VIDEO</b>	
Image Device	1/2.8" SONY Exmor CMOS Sensor 2.0 Megapixel
Total Pixel	1952(H)x1236(V)
Min. Illumination	Color 0.5 Lux@, BW: 0.1 LUX, F2.2 50IRE (IR ON)
Video Compression	H.264, MJPEG
Security	Multi User Authority, IP Filtering, HTTPS, SSL
Resolution	1920x1080, 1280x1024, 1280x720/960, 704x480/576, 640x360/480, 320x240
Frame Rate	Max. 50/60fps
Image Effect	Flip
Shutter Speed	Auto(1/10,000~1/5sec), Manual
Network Time Sync	NTP Server, Synchronized Computer, Manual
Video Analytics	DIS, Defog, Face Detection, Tampering, Line Detector, Field Detector(Built in VCA)
<b>EXTERNAL IN/OUT</b>	
Audio	1 Input, 1 Output(3.5mm Stereo Jack)
Alarm	4 Input, 1 Output(Terminal Block)
Audio Compression	G.711
Audio Streaming	2 Way
Ethernet	RJ-45(10/100Base-T)
SD Card	Max. 32GB Support
<b>OPERATIONAL</b>	
BLC	Yes
Day and Night Mode	True Day & Night(Auto, Day, Night)
Digital Zoom	12X
Noise Reduction	2DNR
Motion Detection	16 Programmable Area (Include Area 8, Exclude Area 8)
Privacy Mask	12 Programmable Zone
Auto Recovery	Backup, Restore
Protocol	TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, QoS, FTP, UPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf
PTZ Function	Pan: °360 Endless, Tilt Range: 0~180° Auto Calibration: 0.1~6° Preset: 256, Tour: 8, Pattern: 8, Home Function: Yes
Max. User Connection	Live : 10 Users, Playback : 3 Users
<b>LENS</b>	
Focal Length	Optical Zoom 20X, 4.8~57.6mm, F2.2~F2.3
<b>ENVIRONMENTAL</b>	
Operating Temperature	-10°C ~ +50°C,
Operating Humidity	0~90% RH (Non-Condensing)

# AZ-KNZ-2MP12

K-Series

Full HD IP PTZ Camera

ANALOG CAMERA

AHD CAMERA

IP CAMERA

DVR

NVR

## Technical Specification

AZ-KNZ-2MP12	
<b>ELECTRICAL</b>	
Power Supply	12VDC, 24VAC
Power Consumption	250mA(12.0W)@PoE 1,000mA(12.0W)@12VDC, 24VAC
PoE	Yes
<b>MECHANICAL</b>	
Dimension (mm)	154(Ø)x150(H)mm
Net Weight	1.6Kg
Optional Accessories	Wall/Ceiling Bracket